


Cartulina pasta química estucada por las dos caras con una alta blancura.



Mètodes d'impressió

Offset  
Impresión digital

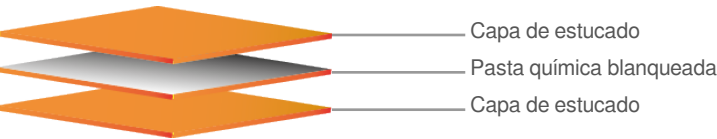

| ESPECIFICACIONS TÈCNIQUES |                      |                                    |                                    |
|---------------------------|----------------------|------------------------------------|------------------------------------|
| GRAMAJE (g/m2) (T-410)    | ESPESOR (µm) (T-411) | RIGIDEZ TABER 15° (mNm) (ISO 2493) | RIGIDEZ TABER 15° (mNm) (ISO 2493) |
| -                         | -                    | DM                                 | DT                                 |
| 220                       | 254                  | 6.2                                | 3.5                                |
| 260                       | 305                  | 9.7                                | 5.6                                |
| 295                       | 356                  | 14.3                               | 7.9                                |
| 320                       | 406                  | 20.8                               | 11.4                               |
| 345                       | 457                  | 27.7                               | 15.0                               |
| 375                       | 508                  | 36.2                               | 19.5                               |
| 440                       | 610                  | 52.7                               | 28.2                               |

| PROPIEDADES                        |    |
|------------------------------------|----|
| BLANCURA SUPERFICIE (ISO 2470) (%) | 91 |