


ZIBO GC1 SUPER BULK

Folding estucado reverso blanco.

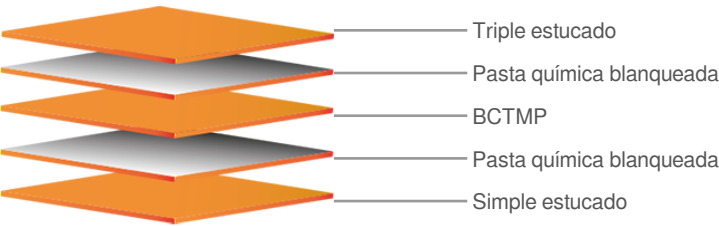

Printing methods

- Offset
- Flexografía
- Huecograbado
- Impresión digital



TECHNICAL SPECIFICATIONS				
GRAMAJE (g/m2) (ISO 536)	ESPESOR (µm) (ISO 534)	RIGIDEZ TABER 15° (mNm) (ISO 2493)		
		DM	DT	
190	265	4.8	2.4	
205	310	7.0	3.2	
215	340	8.0	4.0	
245	400	13.0	6.0	
255	418	15.0	7.0	
290	478	20.0	9.0	
305	490	23.0	11.0	
330	530	26.0	13.0	
345	555	28.5	15.0	
375	590	38.5	18.5	
TOLERANCIA	+/- 3 %	+/- 3 %	+/-15	+/-15

PROPIEDADES	
LISURA SUPERFICIE PPS10 (ISO 8791-4) (µm)	< 1.6
BLANCURA SUPERFICIE (ISO 2470-1) (%)	89 + 3 %
BLANCURA REVERSO (ISO 2470-1) (%)	87 + 3 %
BRILLO (HUNTER 75º) (%)	> 45