


FOLDING MADERA COMCOTE

Folding estucado reverso madera.

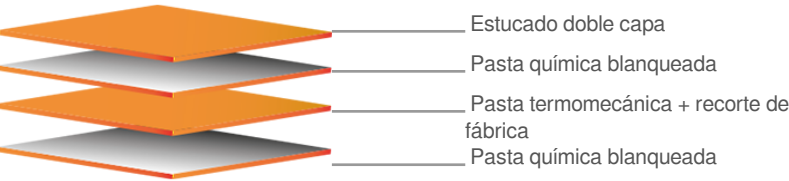

Métodos de impresión

Offset
Huecogrado
Flexografía



Alimentación



Farmacia



Gráfica

ESPECIFICACIONES TÉCNICAS			
GRAMAJE (g/m²)(TAPPI 410)	ESPEJOR (µm)(TAPPI 411)	RIGIDEZ TABER 15° (mNm) (TAPPI 489)	RIGIDEZ TABER 15° (mNm) (TAPPI 489)
-	-	DM	DT
215	356	9.4	4.5
235	406	12.3	6.0
250	432	15.4	7.4
260	470	19.8	9.5
275	500	24.1	11.3
295	533	29.1	14.0
310	559	32.2	15.5
325	610	37.4	18.0
370	690	51.0	23.0
TOLERANCIA	+/- 5%	- 10%	

PROPIEDADES	
LISURA (TAPPI 555) (pps)	1.0 µm + 0.5
BLANCURA (ISO2470-1) (%)	84 +/- 2%
BRILLO 75° (TAPPI 480) (%)	84 +/- 2
HUMEDAD (TAPPI 412) (%)	>= 40

0711048

Junio 2025

El Fabricante del material se reserva el derecho a modificaciones sin previo aviso.
Certificado de Cadena de Custodia CU-COC-821792 para poder servir este material certificado FSC.