


METSÄBOARD PRO FBB BRIGHT (GC1)

Folding estucado con reverso blanco.

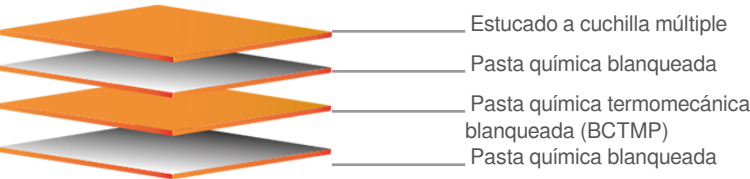

Métodos de impresión

Offset
Impresión digital
Flexografía
Huecograbado



ESPECIFICACIONES TÉCNICAS			
GRAMAJE (g/m ²) (ISO 536)	ESPESOR (µm) (ISO 534)	RIGIDEZ TABER 15° (mNm) (ISO 2493-2)	RIGIDEZ TABER 15° (mNm) (ISO 2493-2)
-	-	DM	DT
180	260	5.2	2.4
195	305	7.8	3.8
220	355	11.0	5.4
230	385	13.5	6.6
245	415	16.5	7.5
255	435	18.4	9.0
265	455	20.2	10.0
280	485	23.3	11.6
290	505	26.3	13.0
320	555	32.5	16.0
350	610	38.0	19.0
TOLERANCIA	+/- 2%	+/- 3%	- 15%

PROPIEDADES	
LISURA SUPERFICIE PPS 10 (ISO 8791-4) (µm)	1.0 (max 1.3)
BLANCURA SUPERFICIE (C/2°) (ISO 2470-1) (%)	91 ± 1
BRILLO (HUNTER 75°) (ISO 8254-1) (%)	48 ± 5
TEST ROBINSON (12 meses en embalaje original) (EN 1230-2)	< 1