


TP WHITE PLUS

Folding reverso blanco.

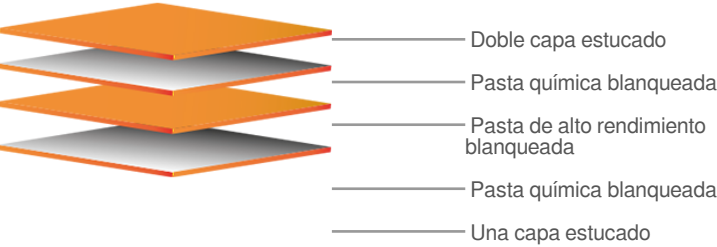

Métodos de impresión

Offset
Flexografía



Alimentación



Cosmética



Editorial



Farmacia



Higiene



Limpieza

ESPECIFICACIONES TÉCNICAS

GRAMAJE (g/m ²) (ISO 536)	ESPESOR (μm) (ISO 534)	RIGIDEZ TABER 15° (mNm) (TAPPI 489)	RIGIDEZ TABER 15° (mNm) (TAPPI 489)
-	-	DM	DT
210	305	9.8 (>= 7.5)	4.9 (>= 3.7)
225	356	13.9 (>= 11.1)	6.9 (>= 5.5)
240	381	16.4 (>= 13.9)	8.2 (>= 7.0)
262	432	21.8 (>= 18.5)	10.9 (>= 9.3)
275	457	25.3 (>= 21.5)	12.0 (>= 10.2)
285	483	27.6 (>= 23.4)	13.8 (>= 11.7)
310	533	33.9 (>= 28.9)	17.0 (>= 14.4)
330	559	38.9 (>= 33.1)	19.4 (>= 16.5)
350	584	43.8 (>= 37.3)	21.9 (>= 18.6)
TOLERANCIA	+/- 4%	+/- 4%	

PROPIEDADES

BLANCURA ISO SUPERFICIE (ISO 2470) (%)	86.5 (> 85)
HUMEDAD (TAPPI 412) (%)	7 ± 1

1002016

Junio 2025

El Fabricante del material se reserva el derecho a modificaciones sin previo aviso.
Certificado de Cadena de Custodia CU-COC-821792 para poder servir este material certificado FSC Mix 70%