


COMKRAFT CMPC RC (NEW)



Folding estucado una cara con el reverso de pasta química sin blanquear.

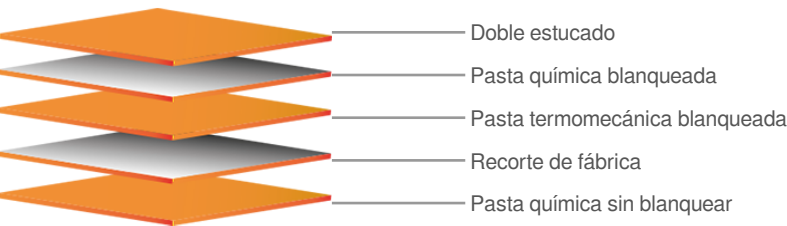

Métodos de impresión

Offset
Flexografía



ESPECIFICACIONES TÉCNICAS			
GRAMAJE (g/m²)(TAPPI 410)	ESPESOR (µm)(TAPPI 411)	RIGIDEZ TABER 15° (mNm) (TAPPI 489)	RIGIDEZ TABER 15° (mNm) (TAPPI 489)
-	-	DM	DT
180	280	5.5	2.5
200	315	7.9	3.6
225	400	13.3	6.4
240	430	16.0	7.7
250	450	19.3	9.3
275	510	24.5	11.8
285	535	26.3	12.5
300	560	31.3	14.9
320	610	38.3	18.3
340	655	43.9	20.6
365	710	52.2	24.5
TOLERANCIA	+/- 5%	- 10%	- 10%

PROPIEDADES	
LISURA (TAPPI 555) (pps)	1.0 + 0.5
BLANCURA (ISO2470-1) (%)	81 ± 2