


# ZIBO GC1 SUPER BULK

Folding estucado reverso blanco.

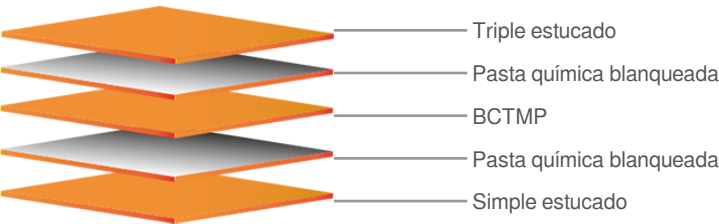

## Méthodes d'impression

- Offset
- Flexografía
- Huecograbado
- Impresión digital



| CARACTÉRISTIQUES TECHNIQUES |                           |                                       |       |       |
|-----------------------------|---------------------------|---------------------------------------|-------|-------|
| GRAMAJE (g/m2)<br>(ISO 536) | ESPESOR (µm)<br>(ISO 534) | RIGIDEZ TABER 15° (mNm)<br>(ISO 2493) |       |       |
|                             |                           | DM                                    | DT    |       |
| 190                         | 265                       | 4.8                                   | 2.4   |       |
| 205                         | 310                       | 7.0                                   | 3.2   |       |
| 215                         | 340                       | 8.0                                   | 4.0   |       |
| 245                         | 400                       | 13.0                                  | 6.0   |       |
| 255                         | 418                       | 15.0                                  | 7.0   |       |
| 290                         | 478                       | 20.0                                  | 9.0   |       |
| 305                         | 490                       | 23.0                                  | 11.0  |       |
| 330                         | 530                       | 26.0                                  | 13.0  |       |
| 345                         | 555                       | 28.5                                  | 15.0  |       |
| 375                         | 590                       | 38.5                                  | 18.5  |       |
| TOLERANCIA                  | +/- 3 %                   | +/- 3 %                               | +/-15 | +/-15 |

| PROPIEDADES                               |          |
|-------------------------------------------|----------|
| LISURA SUPERFICIE PPS10 (ISO 8791-4) (µm) | < 1.6    |
| BLANCURA SUPERFICIE (ISO 2470-1) (%)      | 89 + 3 % |
| BLANCURA REVERSO (ISO 2470-1) (%)         | 87 + 3 % |
| BRILLO (HUNTER 75º) (%)                   | > 45     |